

SMD CERAMIC ANTENNA
Data Sheet

KH-1608-16-C

For 2400-2483MHz
1.6x0.8mm [EIA1608]

Feature

- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain
- Operating Temp. : -40°C ~ +85°C

Application

- Bluetooth, Wireless LAN, Mobile TV
- Home RF system, etc




Electrical Characteristics per line(TA = 25 °C)

Parameter	Specification	Units
Frequency Band	2400~2483	MHz
Polarization	Linear	
*Peak Gain	2.36	dBi
*Peak Efficiency	72.5%	%
Impend ance	50	Ω

*Test condition: Test board size 98*65 mm; Matching circuit: Pi matching circuit will be required

Typical Characteristics


Fig. 1 VSWR

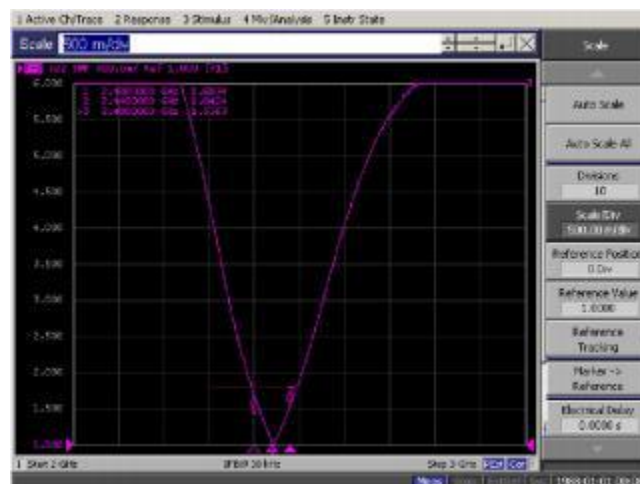


Radiation Pattern

The Gain pattern is measured in FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.


Fig.2
FAR-field Chamber

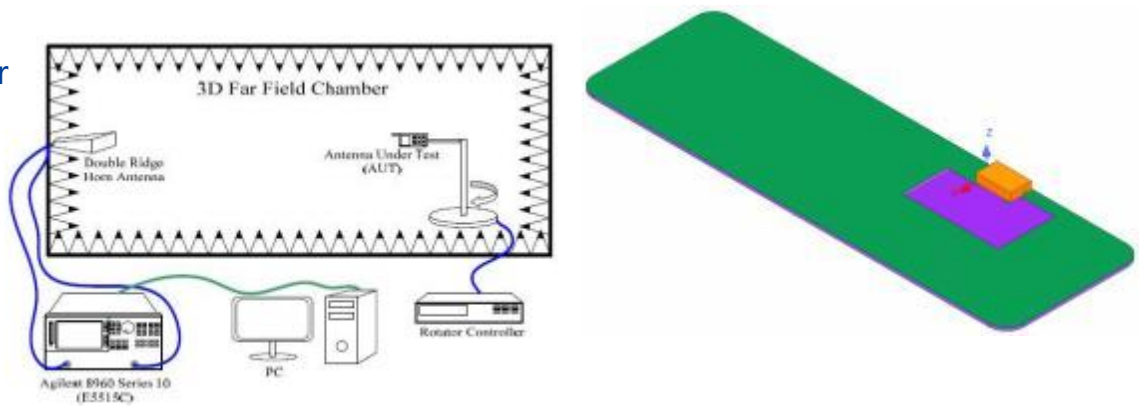


3D 增益模式Gain Pattern (2400 MHz)

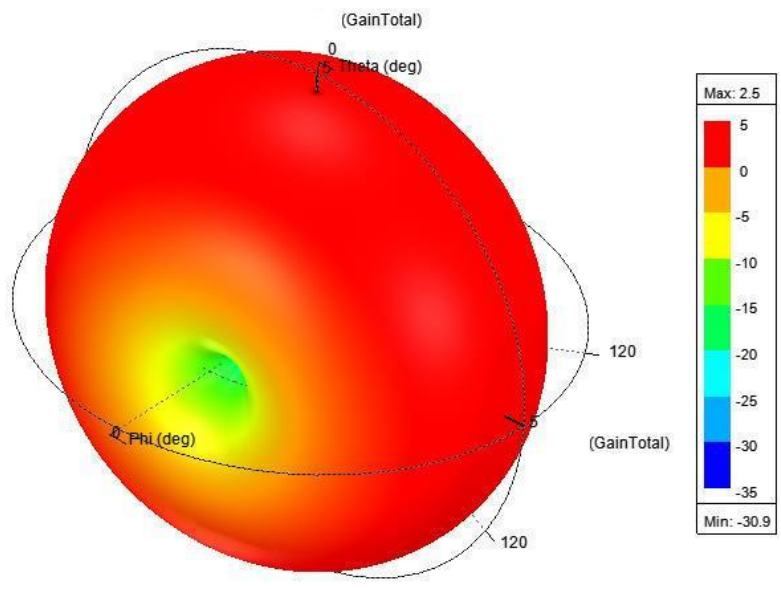

3D Gain Pattern (2450 MHz)

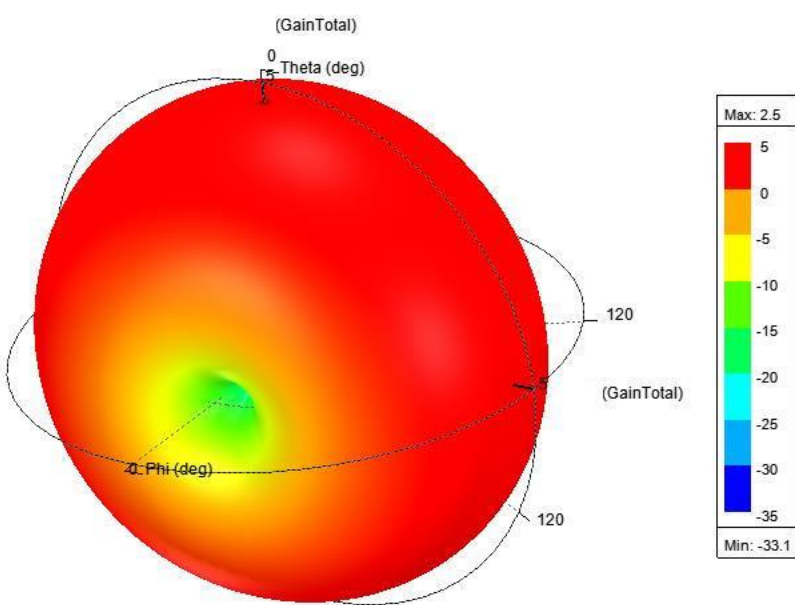

3D Gain Pattern (2500 MHz)

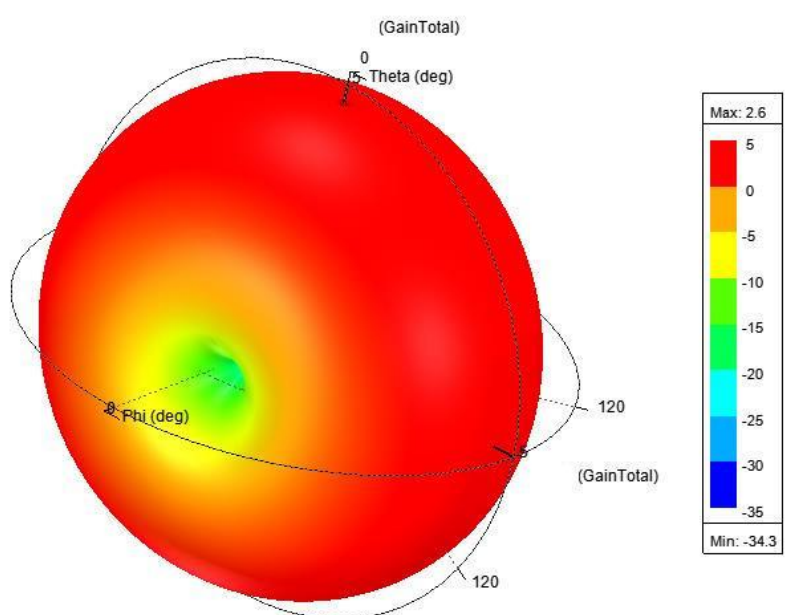

Item	Condition	Specification
Thermal shock	1. 30±3 minutes at -40°C±5°C, 2. Convert to +105°C (5 minutes) 3. 30±3 minutes at +105°C±5°C, 4. Convert to -40°C (5 minutes) 5. Total 100 continuous cycles	No apparent damage Fulfill the electrical spec. after test.
Humidity resistance	1. Humidity: 85% R.H. 2. Temperature: 85±5°C 3. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
High temperature resistance	No apparent damage Fulfill the electrical spec. after test.	1. Temperature: 150°C±5°C 2. Time: 1000 hours.
Low temperature resistance	1. Temperature: -40°C±5°C 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Soldering heat resistance	1. Solder bath temperature : 260±5°C 2. Bathing time: 10±1 seconds	No apparent damage
Solderability	The dipped surface of the terminal shall be at least 95% covered with solder after dipped in solder bath of 245±5°C for 3±1 seconds.	No apparent damage

(2) Storage Condition


(a) At warehouse: The temperature should be within 0 ~ 30°C and humidity should be less than 60% RH. The product should be used within 1 year from the time of delivery.

(b) On board: The temperature should be within -40 ~ 85°C and humidity should be less than 85% RH.

(3) Operating Temperature Range

Operating temperature range : -40°C to +85°C.

Recommended Reflow Solder curve

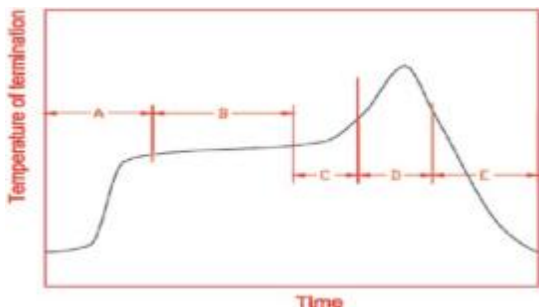

A	1 st rising temperature	The normal to Preheating temperature	30s to 60s
B	Preheating	140°C to 160°C	60s to 120s
C	2 nd rising temperature	Preheating to 200°C	20s to 40s
D	Main heating	# 220°C	50s~60s
		# 230°C	40s~50s
		# 240°C	30s~40s
		# 250°C	20s~40s
E	Regular cooling	# 260°C	20s~40s
		200°C to 100°C	1°C/s ~ 4°C/s

*reference: J-STD-020C

(1) Soldering Gun Procedure


Note the follows, in case of using solder gun for replacement.

- (a) The tip temperature must be less than 350°C for the period within 3 seconds by using soldering gun under 30 W.
- (b) The soldering gun tip shall not touch this product directly.

(2) Soldering Volume

Note that excess of soldering volume will easily get crack the body of this product.


Product Dimension

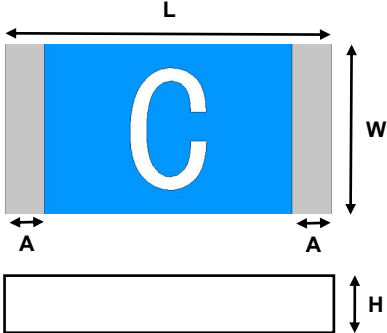

Units:mm


L	W	H	A
1.60±0.20	0.80±0.20	0.40±0.10	0.2±0.07

Evaluation Board

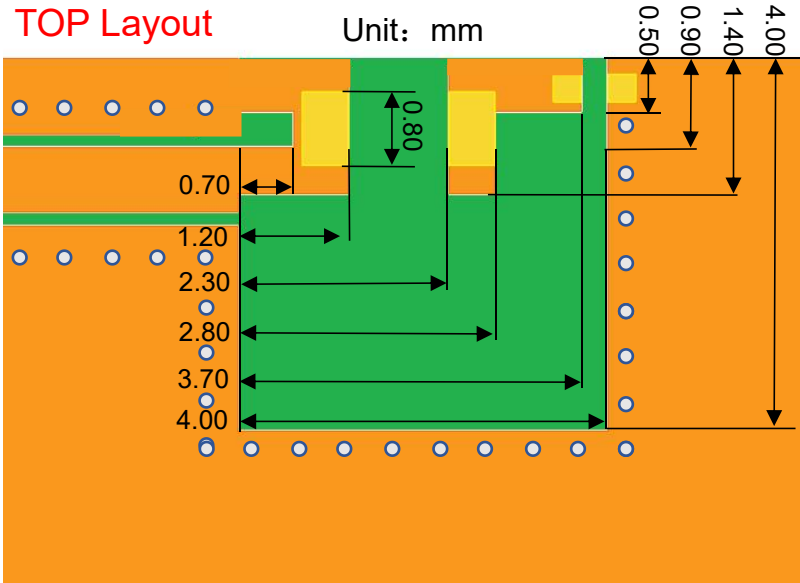


Note: The spacing between antenna pads should not be < 1.1mm

Application Guide

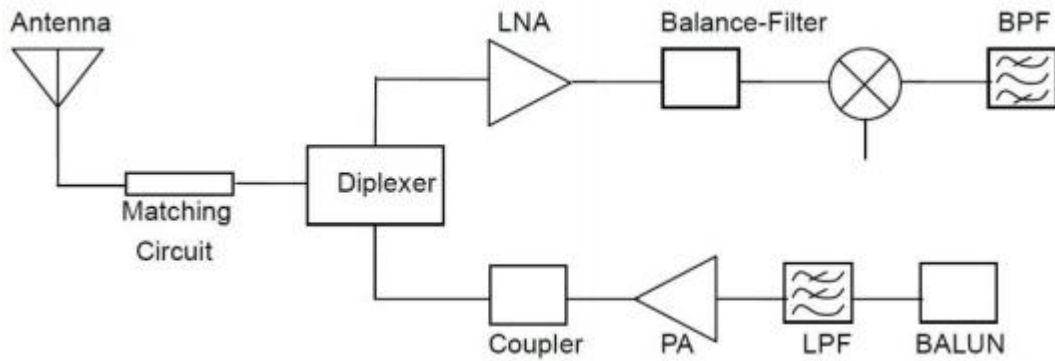

Package Information

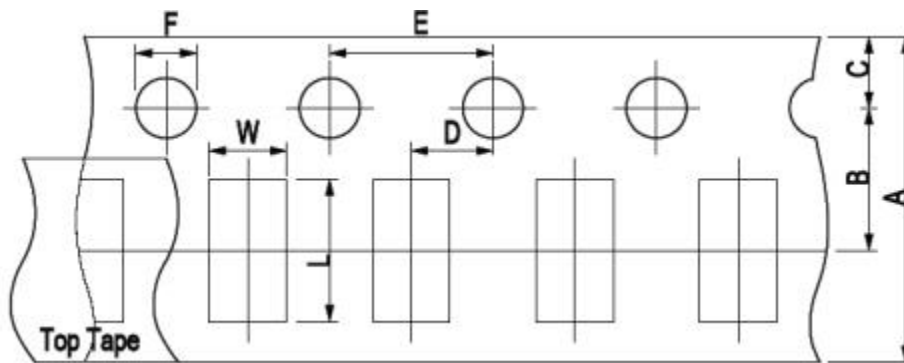

A	B	C	D	E	F	L	W
8.00±0.3	3.50± 0.05	1.75±0.1	2.00±0.05	4.00±0.1	1.50±0.1	1.87± 0.1	1.12± 0.1

Order Information

Device	Package	Net Weight	Carrier	Quantity	HSF Status
KH-1608-16-C	1608	0.002g	Tape&Reel	5000pcs	RoHS compliant

Revision history

Date	Revision	Description of changes
2022-12-2	1.0	First Version
2023-12-6	1.1	Modify PCB layout
2024-07-12	1.2	Update 3D image