


| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |
| | | | | | |

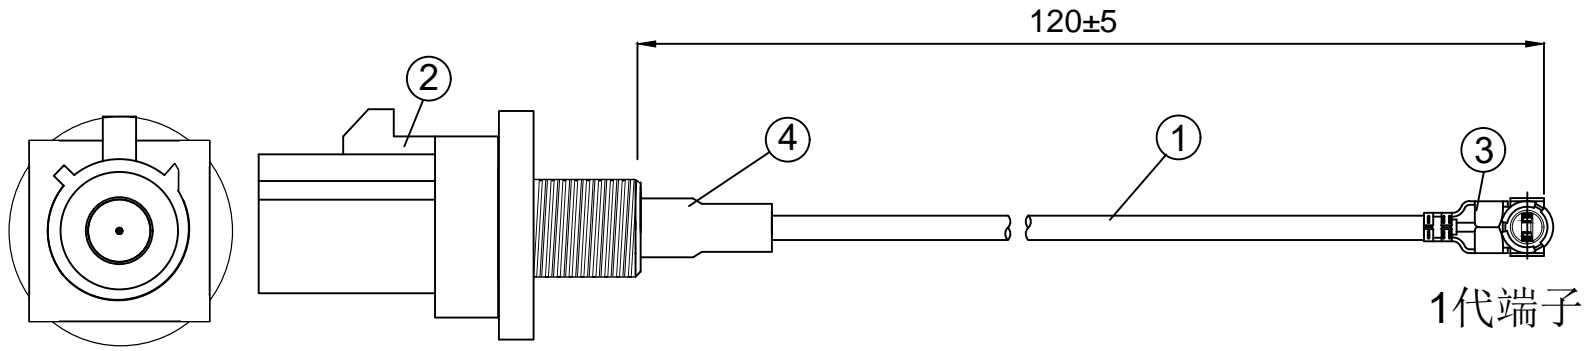

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
 - MATERIAL:
 - SEE TABLE
 - ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-------------------------------|------|
| ④ | 套管 | 黑色热缩套管, OD:2.0MM | AS |
| ③ | 端子 | 国产I-PEX 1.13 1代端子, 镀金 | 1 |
| ② | 接头 | 防水FAKAR 公头公针, 白色B型,接1.13线 | 1 |
| ① | 同轴线 | RF1.13cable, 黑色同轴线, OD:1.10mm | AS |

深圳市金航标电子有限公司

| | | | | | |
|----------------------------------|------------------------------|--------|--------------|-----------|---|
| ALL DIMENSION ARE IN MM | DRAWN | Jamy | DATE | 2026-3-10 | KH-FSFAKRABJ-IPEX-RG1.13-B120 I-PEX1.13 TO FAKRA 防水白色B型, L=120mm |
| | ENG. | | | | |
| COMPUTER GENERATED IN SOLIDWORKS | MFG. | | | | |
| DO NOT SCALE THIS DRAWING | Q.A. | | | | |
| PROJECTION | GENERAL TOLERANCE FOR ANGLES | | X.X | X.XX | X.XXX |
| | | | ± 1° | ± 0.3 | ± 0.25 ± 0.150 |
| CUSTOMER P/N: | SIZE | Number | | REV | A |
| | B | | | | |
| | SCALE: Free | TYPE | SHEET 1 OF 1 | | |