
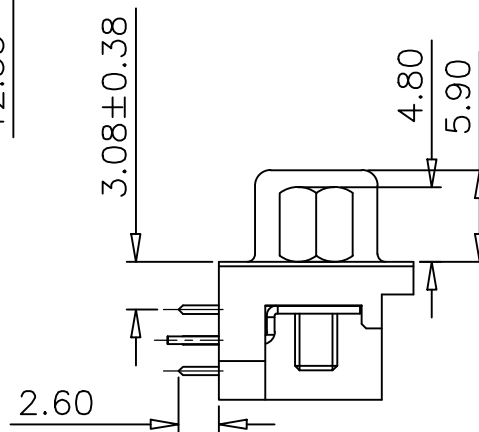


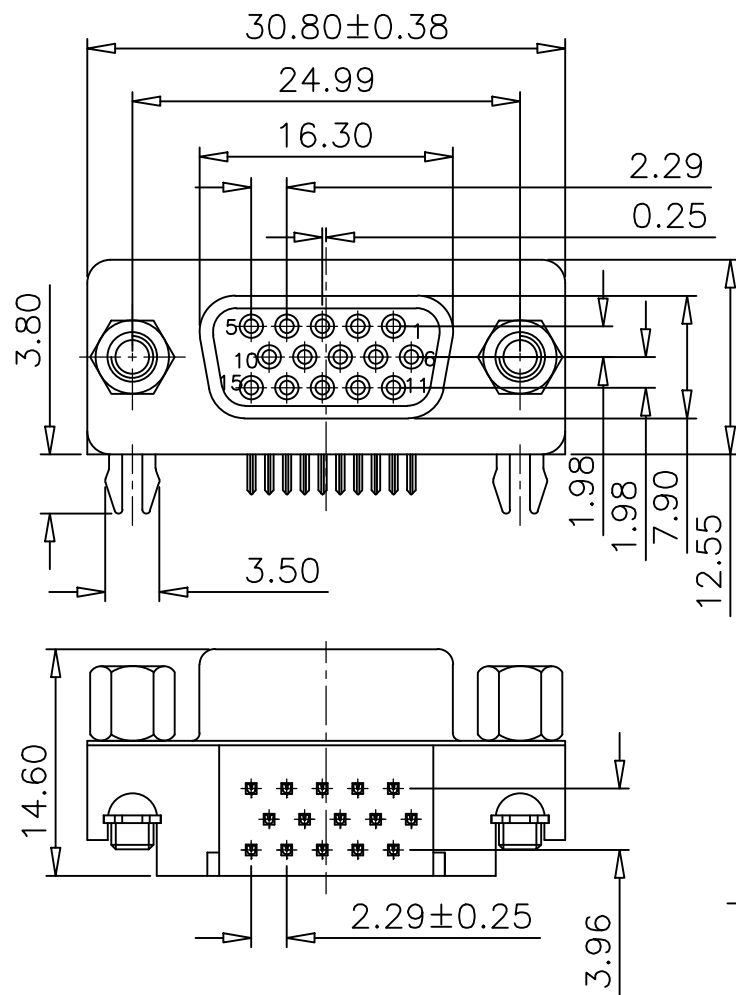

1. Electrical Specification:


- 1.1 Current Rating: 1.5A AC/DC
- 1.2 Voltage Rating: 40V AC/DC
- 1.3 Contact Resistance: 30m ohm max
- 1.4 Insulation Resistance: 1000M ohm min
- 1.5 Dielectric Withstanding Voltage: 500V DC

2. Material and Finish:

- 2.1 Housing: PBT
- 2.2 Latch: PBT
- 2.3 Contact: Brass
- 2.4 Shell: SPCC
- 2.5 Contact Plating: Tin Plating Over All

3. Environmental

Operating Temperature: -20°C - +80°C

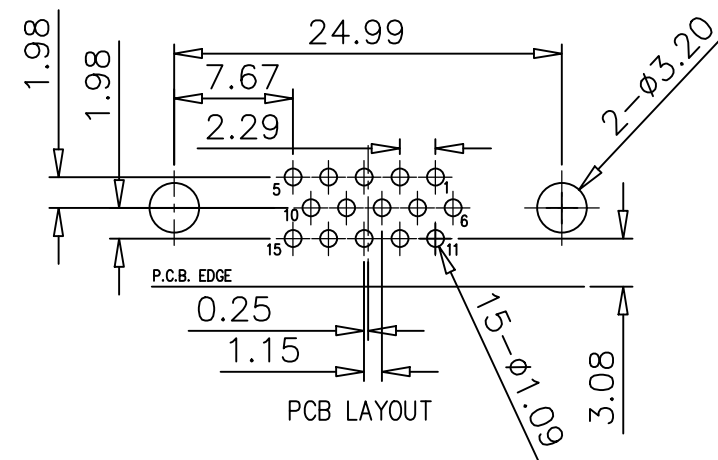

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2

SCALE: AS SHOWN

UNIT: mm

DRAWN


07/07/08

CHECKED

07/07/08

APPROVED

07/07/08



SIZE A4

REV. A

深圳市金航标电子有限公司

SHENZHEN KINGHELM ELECTRONIC TECHNOLOGY CO., LTD

www.kinghelm.com.cn

0755-28190160

DRAWN NAME:

3.08简易全锡插锁外漏2.6

PRODUCT NO.

KH-HDR15P-F3.08

FILE NAME:

A ECN-20130617001(WAN)

06/17/13

REV. DESCRIPTION

DATE