


# Kinghelm®

| REV. NUMBER |  | DESCRIPTION |  | DWN | CHK | DATE |
|-------------|--|-------------|--|-----|-----|------|
| A           |  | DESIGN      |  |     |     |      |

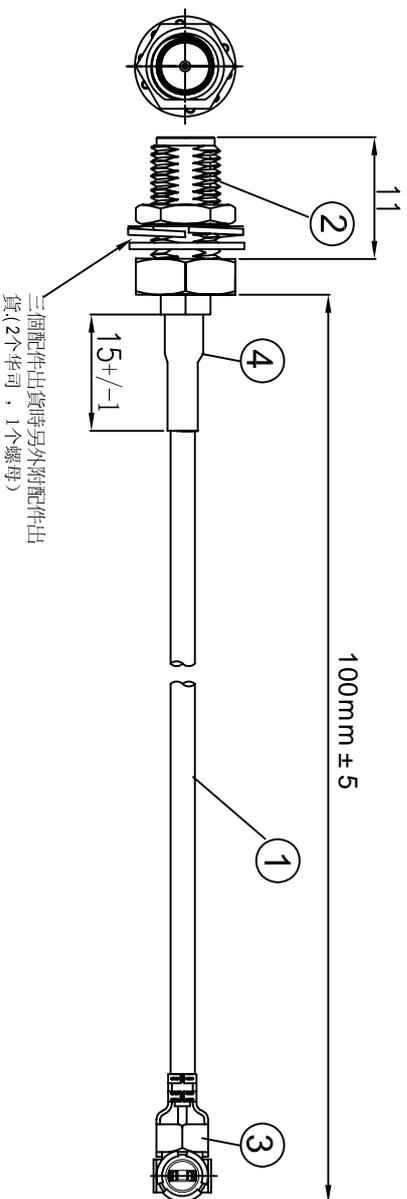

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
  - 2.1. SEE TABLE
3. MECHANICAL:
  - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION          | QTY. |
|----------|-------------|----------------------|------|
| ④        | 套管          | 黑色热缩套管, OD:2.0MM     | AS   |
| ③        | 端子          | 高仿I-PEX, 1.13端子, 镀金  | 1    |
| ②        | 接头          | SMA母头内孔, 分体, 11牙, 镀金 | 1    |
| ①        | 同轴线         | RF 1.13灰色线,OD:1.13mm | AS   |

深圳市金航标电子有限公司 [WWW.BDS666.COM](http://WWW.BDS666.COM)

KHB(RG113)-100-29 0755-83044319

|  |  |                               |            |                                |  |
|--|--|-------------------------------|------------|--------------------------------|--|
| ALL DIMENSION ARE IN MM                                |  | DRAWN                         | DATE       | TITLE                          |  |
|  |  | Janny                         | 2018/05/04 | RF CABLE                       |  |
| COMPUTER GENERATED IN SOLIDWORKS                       |  | ENG.                          |            | I-PEX 1.13 TO SMA / F L=100 MM |  |
| DO NOT SCALE THIS DRAWING                              |  | MFG.                          |            | SIZE Number                    |  |
| PROJECTION   |  | Q.A.                          |            | REV A                          |  |
| GENERAL TOLERANCE FOR ANGLES ± 1° ± 0.3 ± 0.25 ± 0.150 |  | SCALE: Free TYPE SHEET 1 OF 1 |            |                                |  |

CUSTOMER PIN:

4 3 2 1