


CH1 A/R SWR MKR 3: 1.0922 U
REF 1.000 U 1.000U/ 1 350 000 000.HZ


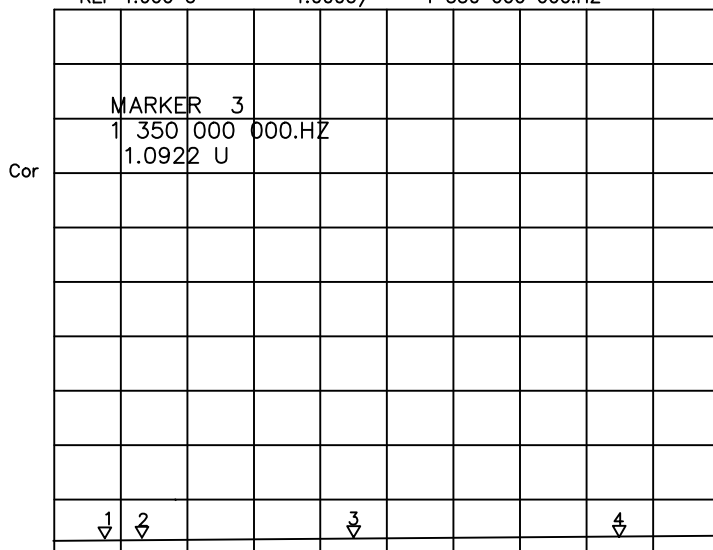


CH1 START 000 000 000.HZ


STOP 3 000 000 000.HZ

MAIN TECHNICAL SPECIFICATIONS

model	Type	KH-IPEX-SMAKWE-B120H
FREQUENCY RANGE	0-3G	
INPUT IMPEDANCE	50 OHM	
VSWR	1:1.2	
GAIN	-----	
POLARIZATION FORM	-----	
RADIATION	-----	
MAXIMUM POWER	-----	
CABLE	RF1.13-100MM	
MAX DIAMETER	13.6mm	
MIN DIAMETER	1.13mm	
CONNECTOR TYPE	IPEX -- SMAKWE	
LIGHTING PROTECTION	DC GROUNDING	

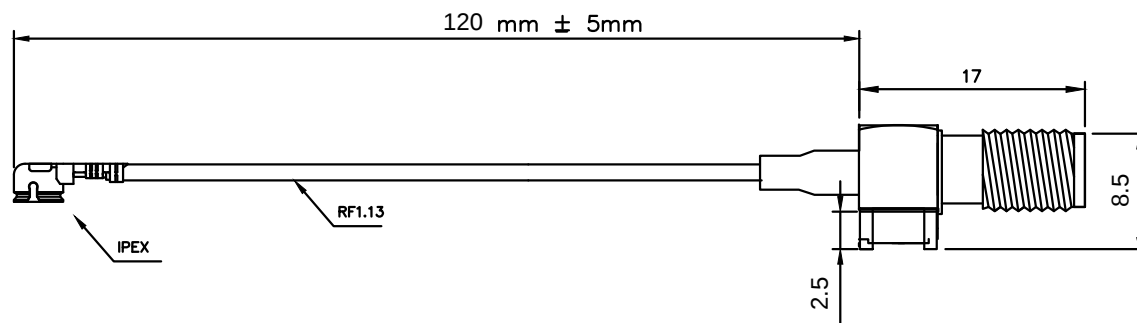

深圳市金航标电子有限公司



技术详询

DWN BY/DATE JIANG 2015-03-25	DESIGN BY/DATE	TOLERANCE .X± .XX± .XXX± ANGLES±	SCALE 1 : 1	UNIT m / m	SH 1 OF 1	ENG PROJECT NO. KH 150325-0025	TITLE 型号 KH-IPEX-SMAKWE-B120H	CONTROL NO.	DWG NO.	REV
------------------------------------	----------------	--	----------------	---------------	-----------	-----------------------------------	----------------------------------	-------------	---------	-----