

D

C

B

A


D

C

B

A

| REVISIONS |        |             |     |     |      |
|-----------|--------|-------------|-----|-----|------|
| REV       | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A         |        | DESIGN      |     |     |      |
|           |        |             |     |     |      |

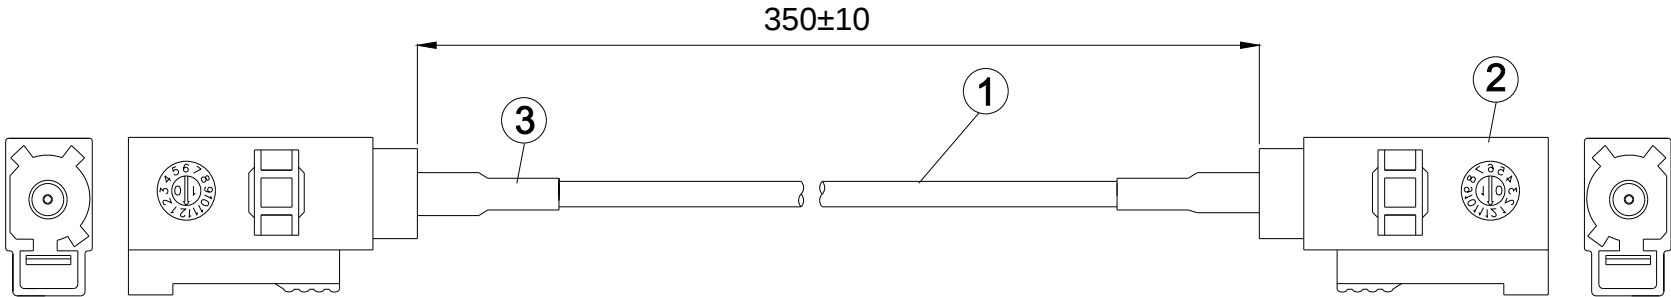

| ITEM NO.                | PART NUMBER | DESCRIPTION                                                  | QTY.            |
|-------------------------|-------------|--------------------------------------------------------------|-----------------|
| ③                       | 套管          | 黑色热缩套管, OD:3.5*15MM                                          | 2               |
| ②                       | 接头          | FAKRA接头母头母针,水蓝色外壳, Z型                                        | 2               |
| ①                       | 同轴线         | 174同轴线 黑色外被,OD:2.8mm                                         | AS              |
| 深圳市金航标电子有限公司            |             | SHENZHEN KINGHELM ELECTRON CO.,LTD.                          |                 |
| WWW.KINGHELM.COM.CN     |             | 0755-28190160                                                |                 |
| ALL DIMENSION ARE IN MM | DRAWN       | Jamy                                                         | DATE 2024-06-17 |
|                         | ENG.        | ALAN                                                         | 2024-06-17      |
|                         | MFG.        | KEN                                                          | 2024-06-17      |
|                         | Q.A.        | TONY                                                         | 2024-06-17      |
| PROJECTION              |             | GENERAL TOLERANCE FOR ANGLES X.X X.XX ± 1° ± 0.13 0.25 0.150 |                 |
| CUSTOMER P/N:           |             | KH-FAKRAZK-FAKRAZK-RG174-350MM                               |                 |
|                         |             | SIZE Number B X.XXX                                          | REV A           |
|                         |             | SCALE: Free TYPE                                             | SHEET 1 OF 1    |

NOTES:

1. ELECTRICAL:

1.1. VOLTAGE RATING:DCV 300V 10MS

1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.

1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.

1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST

1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.