

D

C

B

A


D

C

B

A

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

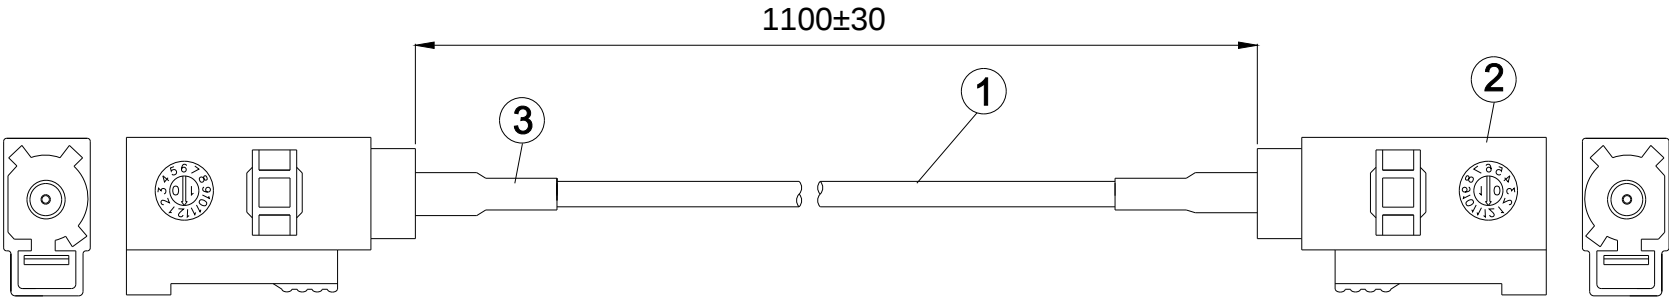

ITEM NO.	PART NUMBER	DESCRIPTION		QTY.
③	套管	黑色热缩套管, OD:3.5*15MM		2
②	接头	FAKRA接头母头母针,水蓝色外壳, Z型		2
①	同轴线	174同轴线 黑色外被,OD:2.8mm		AS
深圳市金航标电子有限公司			SHENZHEN KINGHELM ELECTRON CO.,LTD.	
WWW.KINGHELM.COM.CN			0755-28190160	
ALL DIMENSION ARE IN MM	DRAWN	Jamy	DATE	2024-06-17
	ENG.	ALAN		2024-06-17
	MFG.	KEN		2024-06-17
	Q.A.	TONY		2024-06-17
PROJECTION			KH-FAKRAZK-FAKRAZK-RG174-1.1M	
GENERAL TOLERANCE FOR ANGLES			X.X X.XX	
± 1° ± 0.3 0.25 0.150			SCALE: Free TYPE	
CUSTOMER P/N:			SHEET 1 OF 1	

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
 - MATERIAL:
 - SEE TABLE
 - ALL COMPONENTS ARE RoHS COMPLIANT.

4

3

2

1