

D

C

B

A


D

C

B

A

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

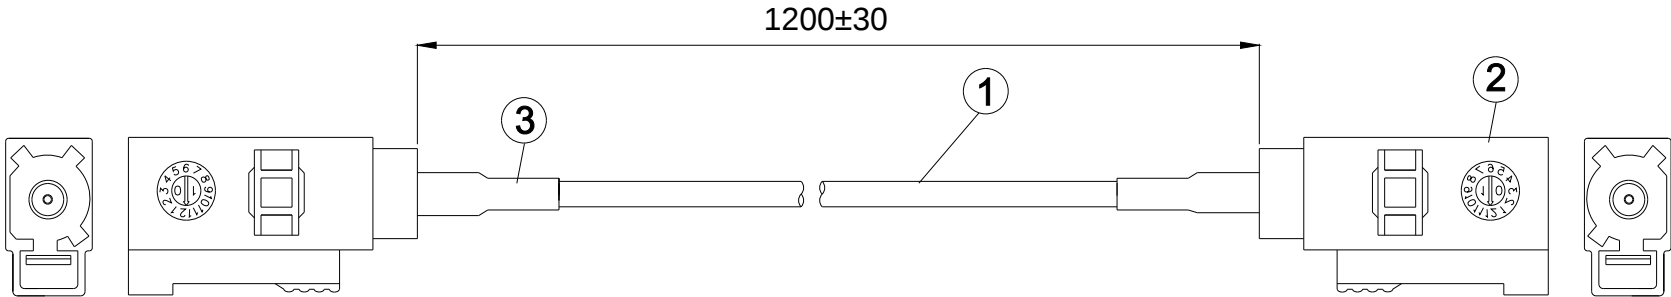

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
③	套管	黑色热缩套管, OD:3.5*15MM	2
②	接头	FAKRA接头母头母针,水蓝色外壳, Z型	2
①	同轴线	174同轴线 黑色外被,OD:2.8mm	AS
深圳市金航标电子有限公司		SHENZHEN KINGHELM ELECTRON CO.,LTD.	
WWW.KINGHELM.COM.CN		0755-28190160	
ALL DIMENSION ARE IN MM	DRAWN	Jamy	DATE 2024-06-17
	ENG.	ALAN	2024-06-17
	MFG.	KEN	2024-06-17
	Q.A.	TONY	2024-06-17
PROJECTION		GENERAL TOLERANCE FOR ANGLES X.X X.XX ± 1° ± 0.3 0.25 0.150	
CUSTOMER P/N:		KH-FAKRAZK-FAKRAZK-RG174-1.2M	
SIZE		Number	REV
B		X.XXX	A
SCALE: Free		TYPE	SHEET 1 OF 1

NOTES:

1. ELECTRICAL:

1.1. VOLTAGE RATING:DCV 300V 10MS

1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.

1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.

1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST

1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.