


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

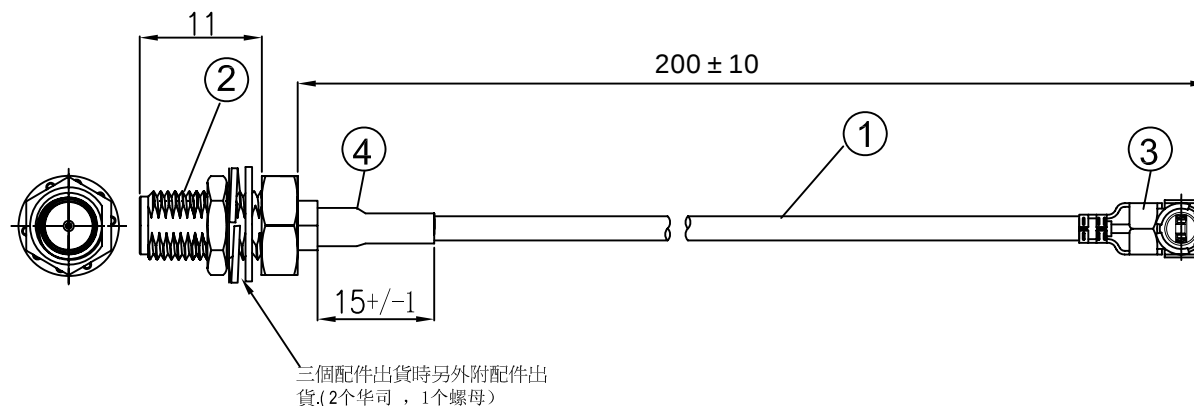

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- MECHANICALL:
 - SMA PULL FORCE: 12.0KGS.
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX ,1.13端子, 镀金	1
②	接头	SMA母头内针, 分体, 11 牙, 镀金	1
①	同轴线	RF 1.13灰色线,OD:1.13mm	AS

深圳市金航标电子有限公司 www.kinghelm.com.cn

KHB200-38(11)-28

0755-83044319

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2018 /05 /04	TITLE RF CABLE I-PEX 1.13 TO SMA /F L=200 MM	
	ENG.			
	MFG.			
	Q.A.		SIZE B	Number A
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING	PROJECTION 		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150	
SCALE: Free		TYPE		SHEET 1 OF 1

CUSTOMER P/N: