


Kinghelm®

ø1.00 吸盘位置

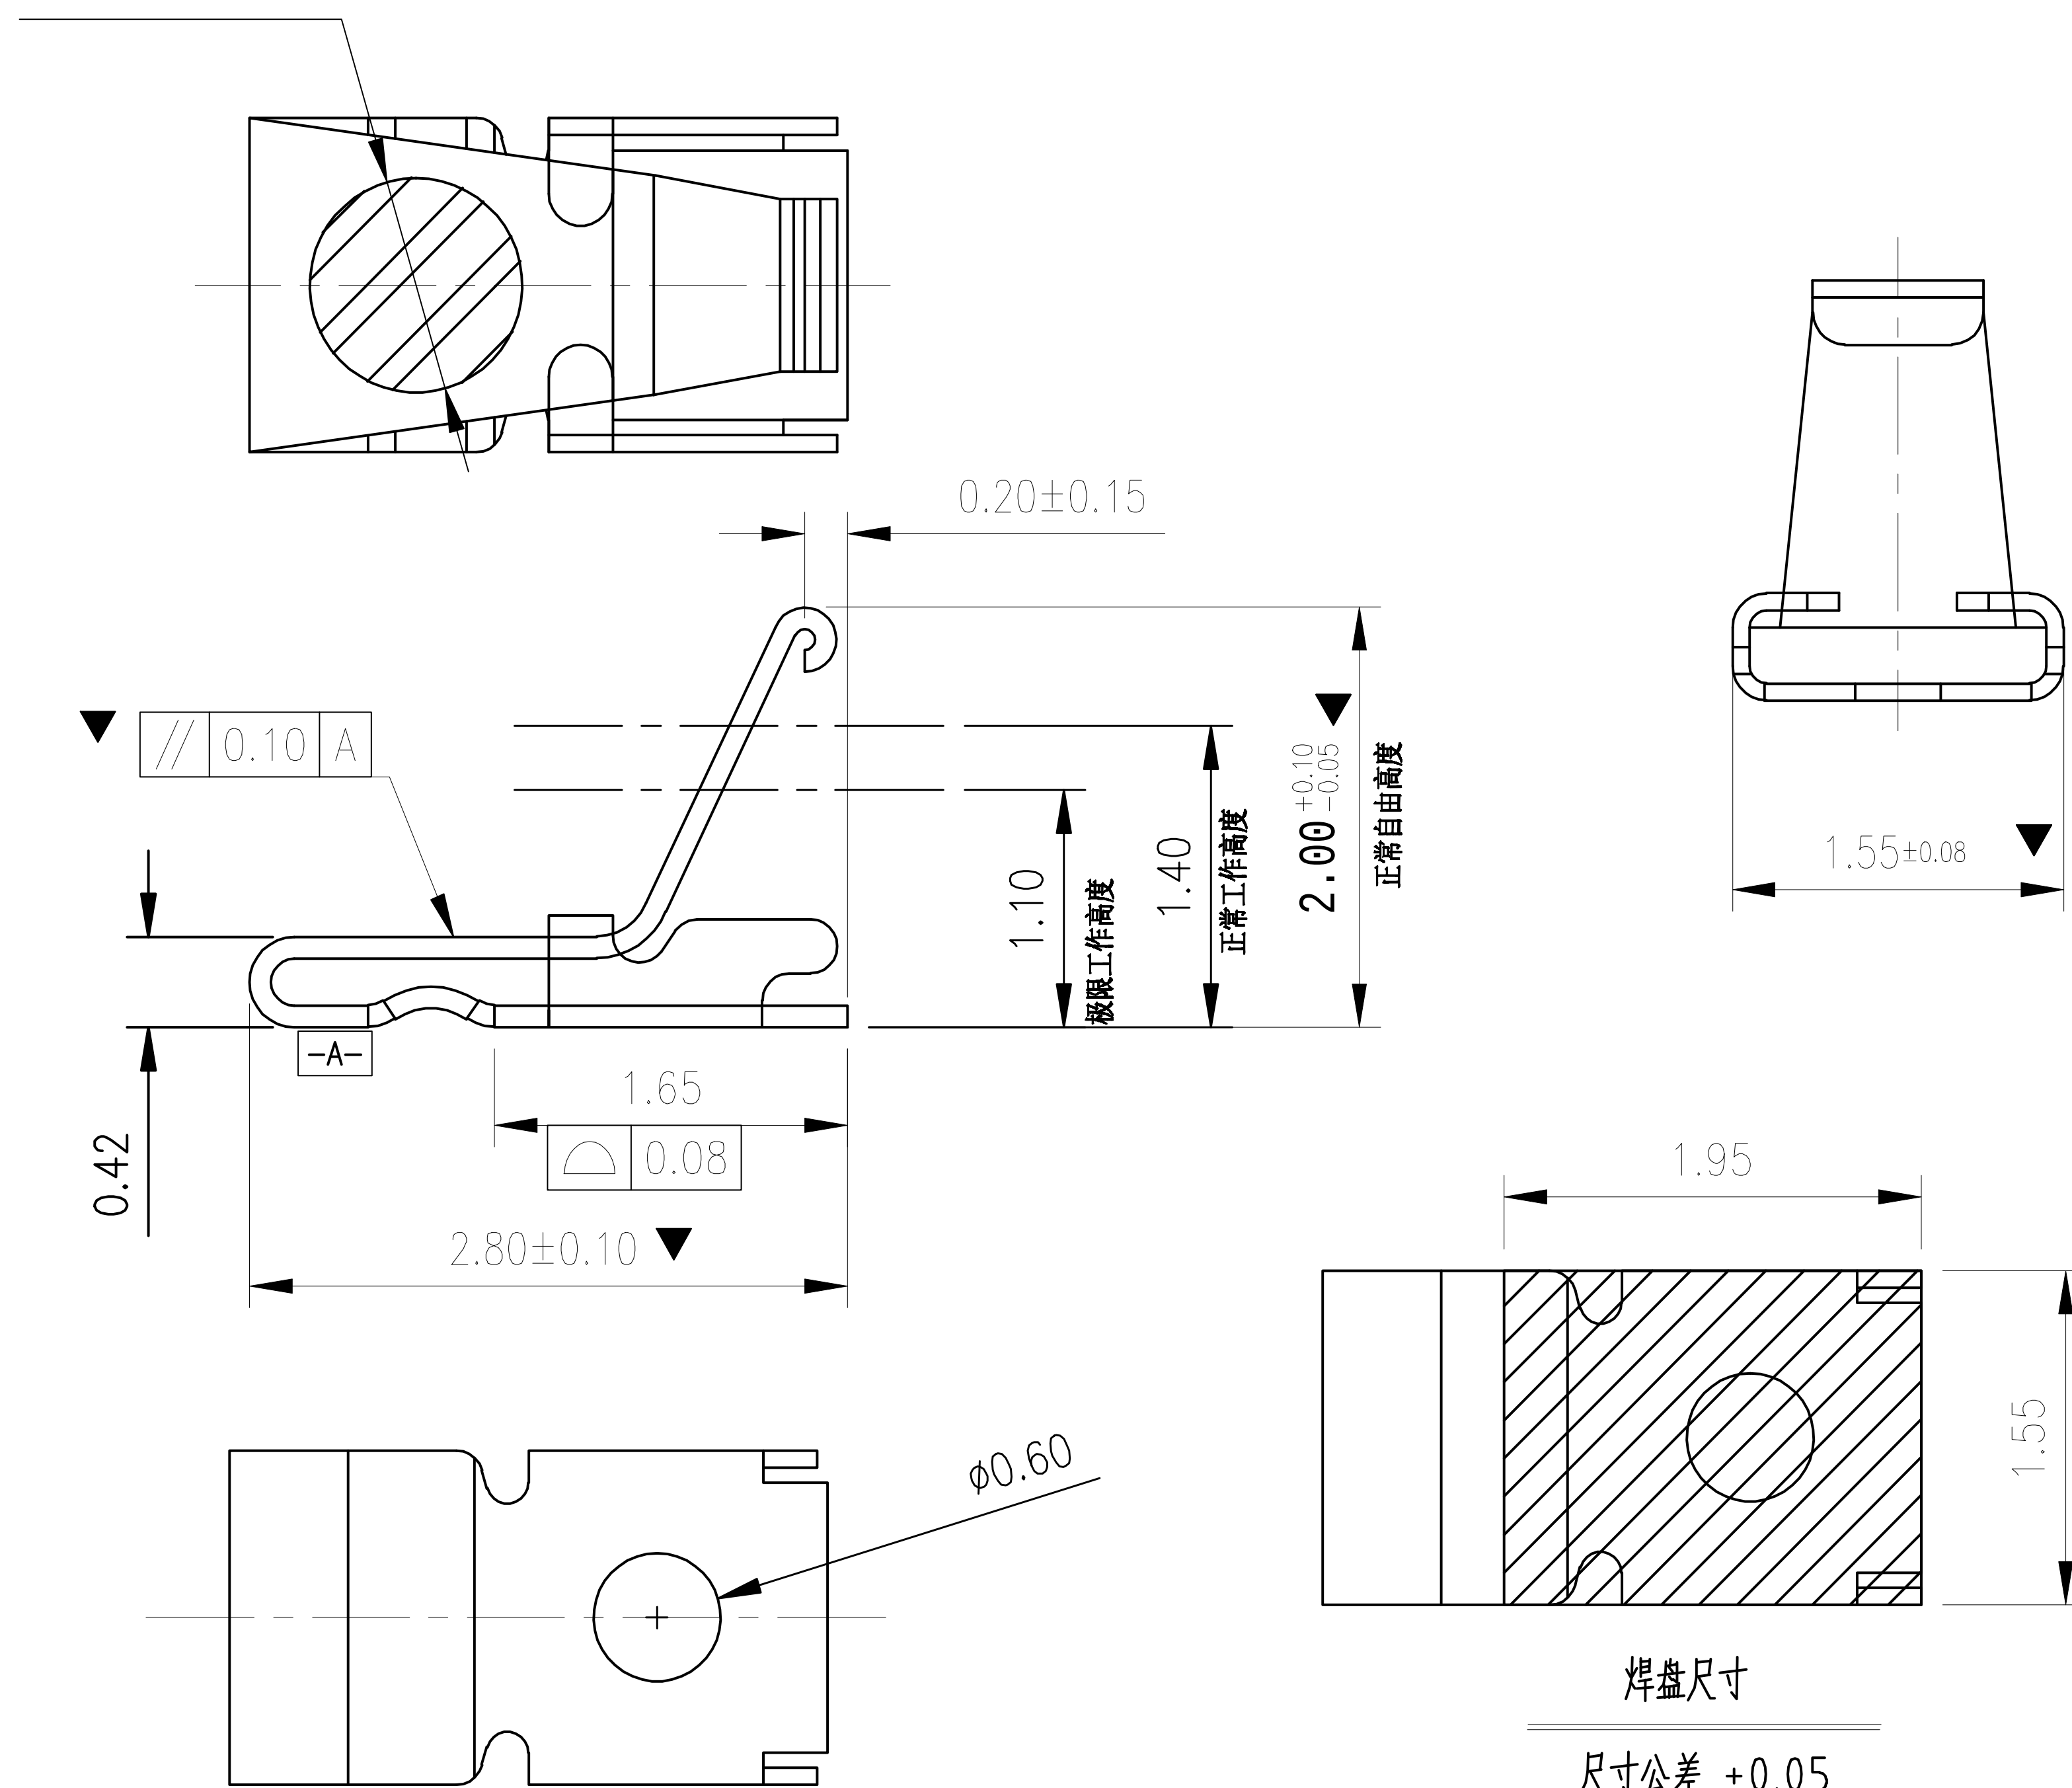


焊盘尺寸

尺寸公差 ±0.05

技术要求:

- 1.材质:不锈钢SUS301,T=0.10±0.005;
- ▼2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50~80u"min,产品外表面镀全金1U"MIN

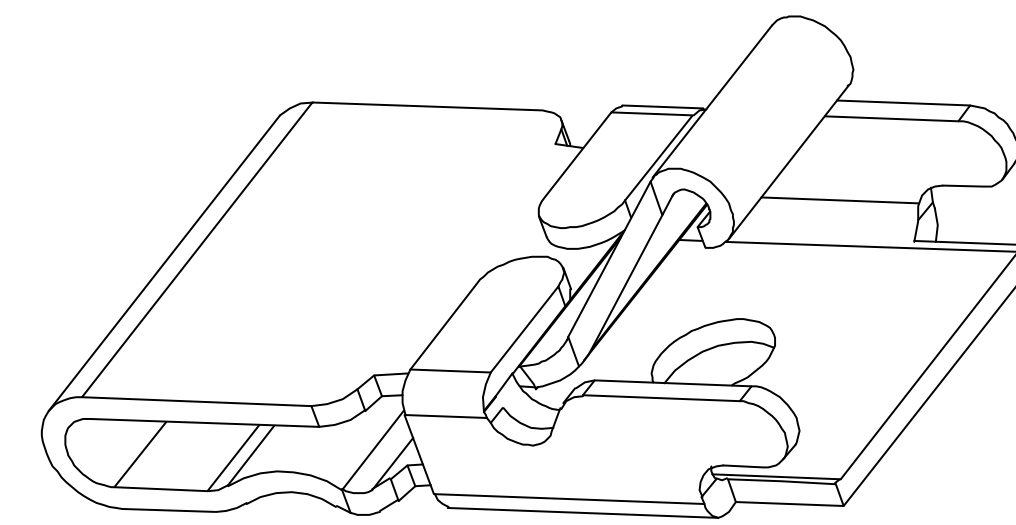

深圳市金航标电子有限公司
www.kinghelm.com.cn
型号: KH-2815520-TP
0755-83044319

GENERAL TOLERANCE

XX. ±0.50

X. ±0.35

.X ±0.25

.XX ±0.15

X.° ±2.0°

.X° ±1.0°

.XX° ±0.5°

SCALE:


1:1

UNIT:

mm

SIZE:

A4



DRAWN

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

681-0025C-2

PARTS NO.(INTENDED USE)

JXH0025C2

TITLE

客户图

RF Antenna Sprinc,SMT,
L2.8*W1.55*H 2.0 mm

REV.

A

SHEET

1/1