
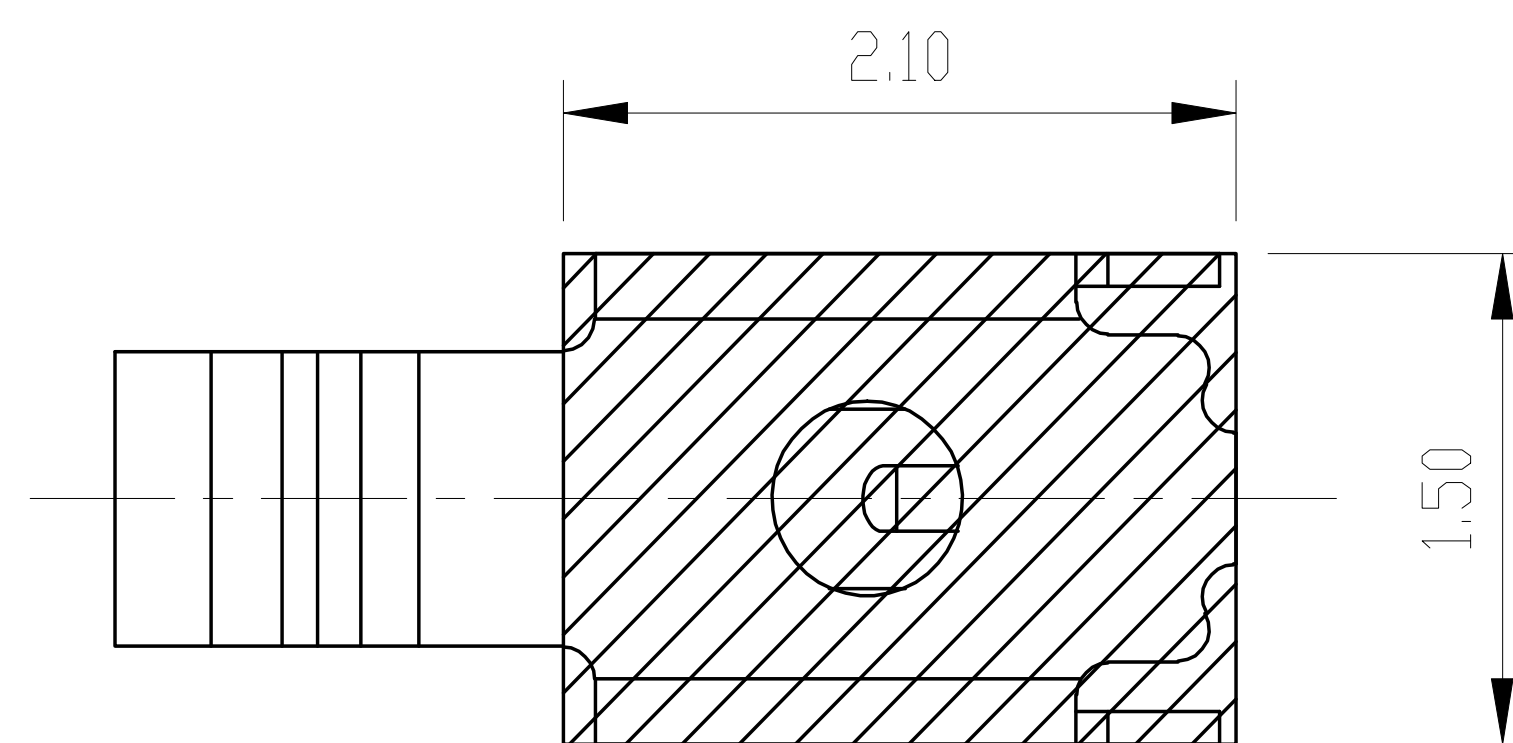
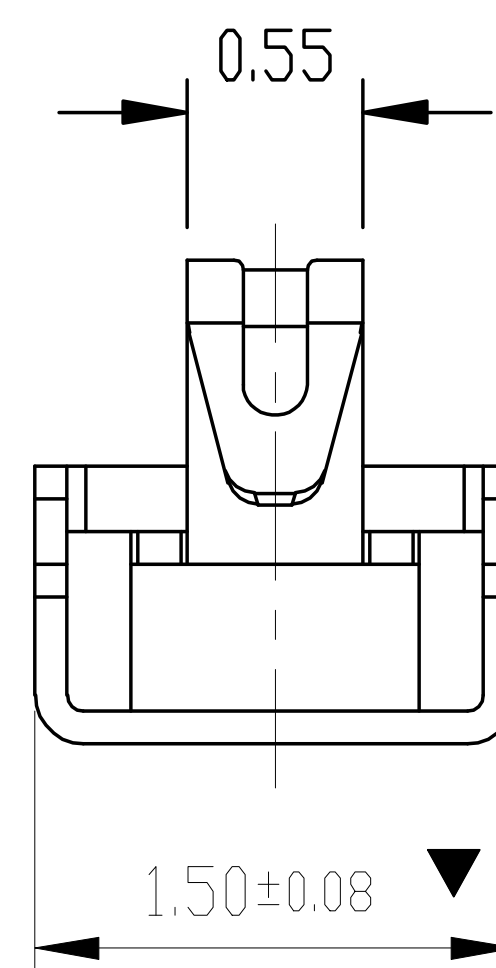
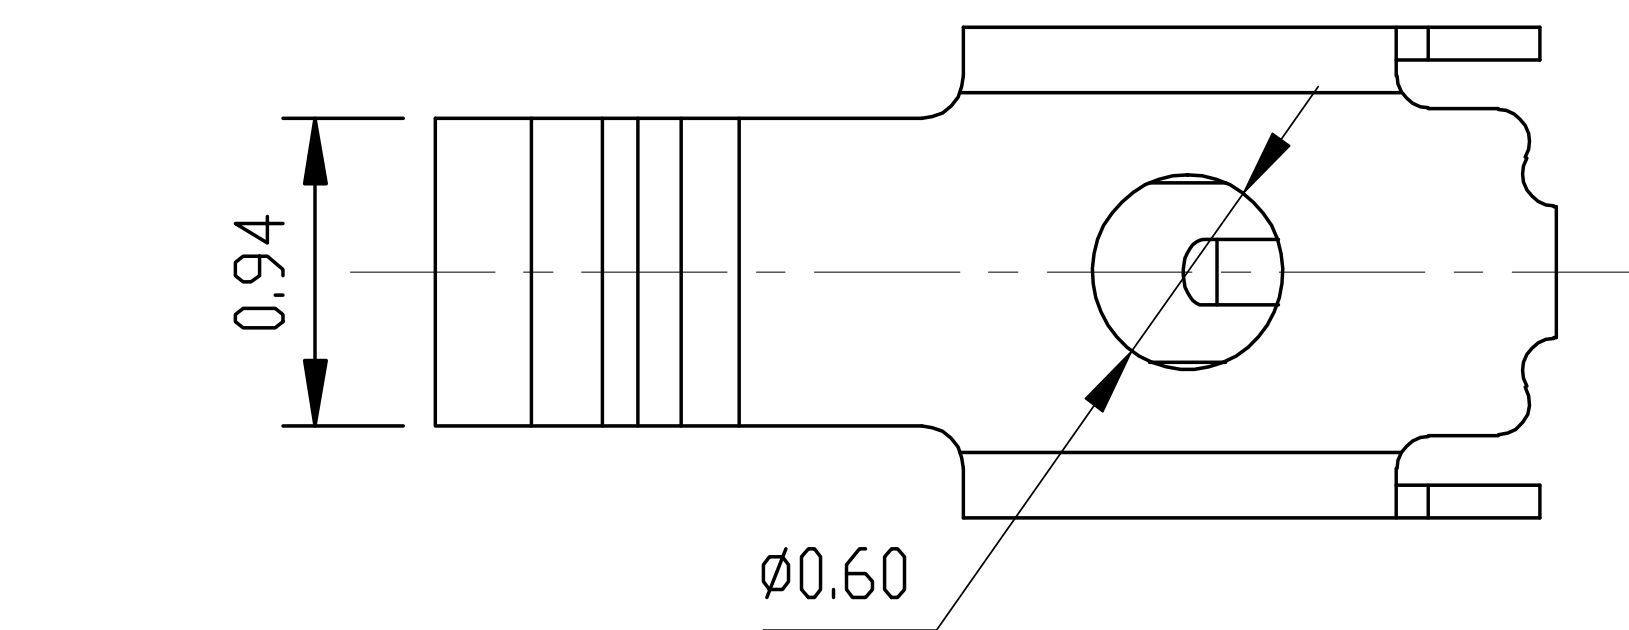
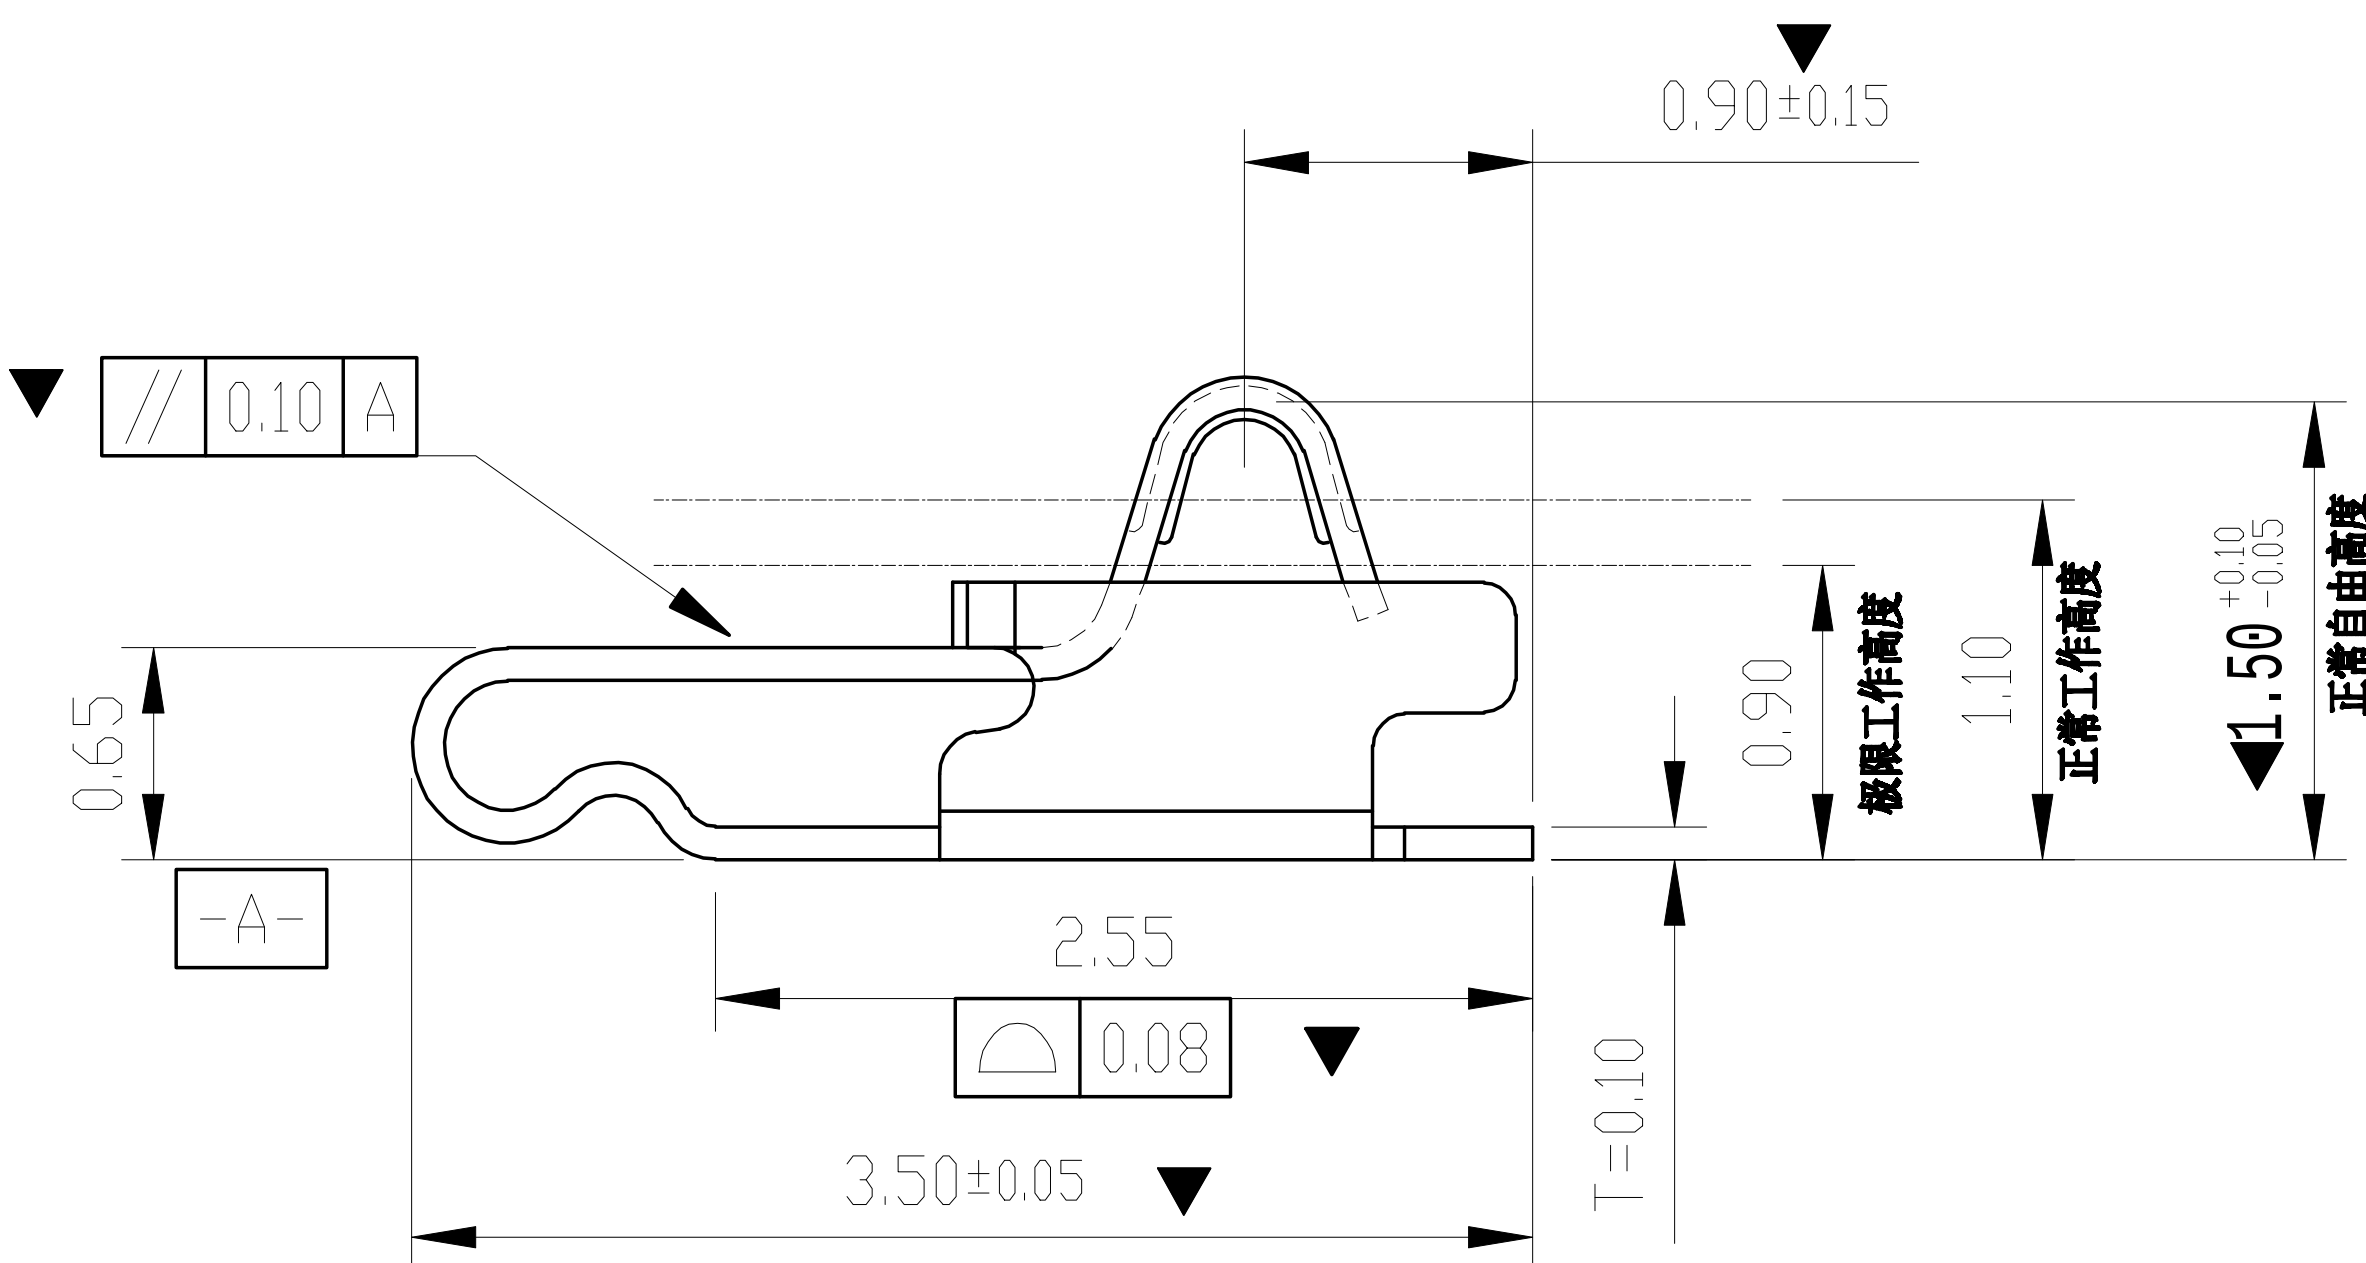



Kinghelm®

Ø0.80 吸盘位置

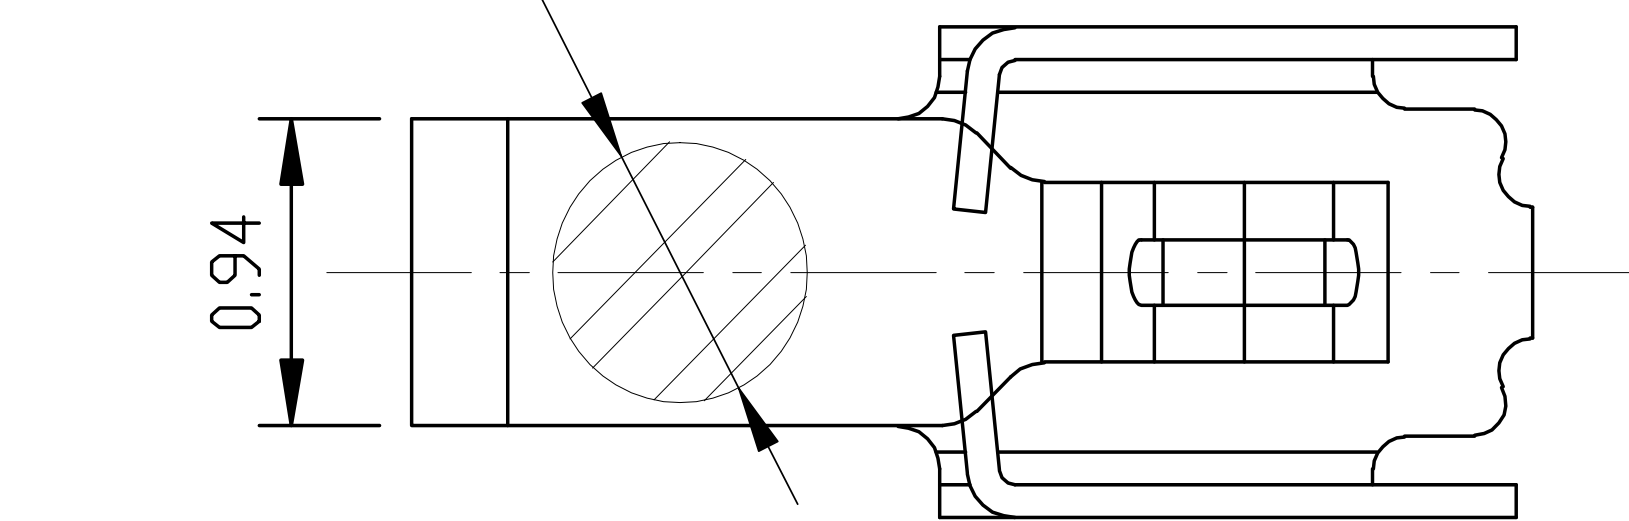

焊盘尺寸

尺寸公差 ±0.05

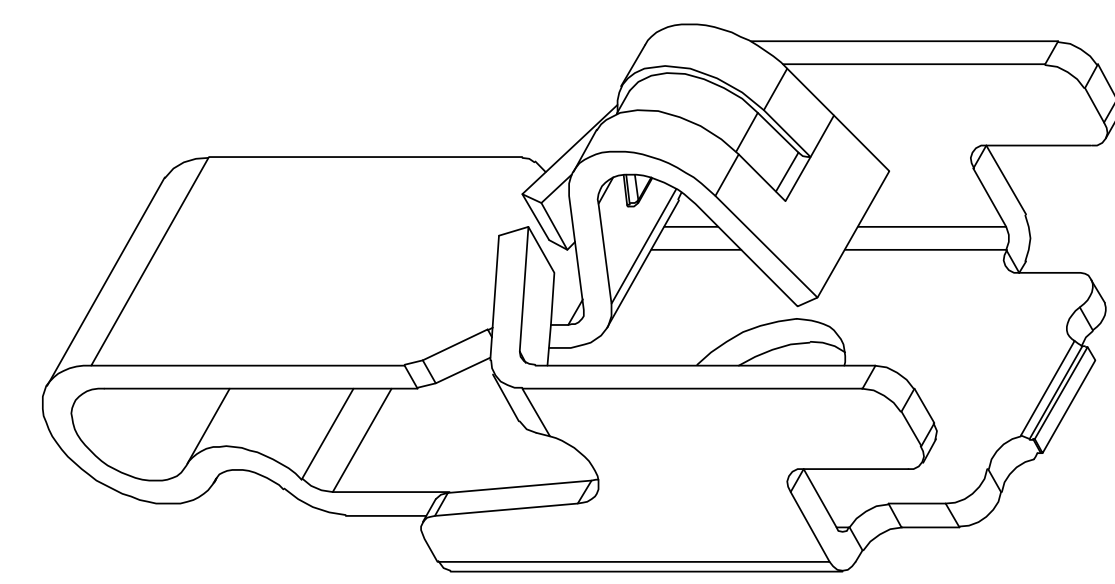

3D图

技术要求:

- 1.材质:不锈钢SUS304, $T=0.10\pm0.005$;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲: $45^\circ/1000\text{mm}$,拱形 $5\text{mm}/1000\text{mm}$;
- 4.标示有"▼"符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50~80u"min,焊接区域镀金,接触区域镀金1U"MIN

深圳市金航标电子有限公司
www.kinghelm.com.cn
型号: KH-351515-TP
0755-83044319

GENERAL TOLERANCE		
XX. ± 0.50		
X. ± 0.35		
.X ± 0.25		
.XX ± 0.15		
	X° $\pm 2.0^\circ$	
	.X° $\pm 1.0^\circ$	
	.XX° $\pm 0.5^\circ$	

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	DATE
CHECK	DATE
APPROVE	DATE

DWG. NO.	681-0024A-1
PARTS NO.(INTENDED USE)	JXH0024A1

TITLE	客户图	REV.	A
	RF Antenna Spring,SMT, L3.5*W1.5*H1.5mm	SHEET	1/1